


Most Trusted Traveling Irrigation Systems Since 1964

Caprari Model D2/65 PTO Pump



- Compact, reliable PTO pump capable of 100 to 425 gpm with corresponding pressures of 108 to 99 psi using 18 to 35 hp
- Available with heavy duty two wheeled trailer or galvanized three point mount
- Designed with industry leading oil lubricated step up gearbox (no belts or pulleys) with shafts supported by widely spaced bearings
- Easily replaceable packing gland type water seal
- Pumps can be fitted with 4" female thread discharge priming valve, hand primer, fluid filled pressure gauge, short suction adapter with 4" female pipe thread and #6 heavy duty 1 3/8 six spline PTO shaft

Technical Specifications								
Discharge & Suction	(Bare or Pump, Cart & Shaft) Flanged							
Discharge & Suction	(Fully Fitted) 4" NPT (F)							
Discharge Position	Horizontal, Right Facing (When Standing Behind The Suction End)							
Length	65 Inches							
Width	48 Inches							
Height	39 Inches							
Weight (Unfitted)	260 lbs.							
Weight (Fitted)	320 lbs.							
Configurations								
Bare Pump	Pump only with weld-on companion flanges, gaskets, nuts & bolts							
Pump, Cart & Shaft	Same as bare pump, but mounted on two- wheeled cart & PTO drive shaft							
Fully Fitted	Sames as pump, cart & shaft plus hand primer, check valve, pressure gauge and suction fittings							
Options (Additional Fees Apply)								
Three-Point Hitch	Fully galvanized frame may be substi- tuted for cart							
Suction Hose	4" x 30' Aquaflex							
Foot Valves & Strainers	4" Cast or Aluminum 45°							

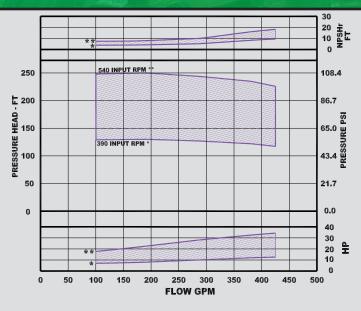

РТО	Input	-	540	RPM
-----	-------	---	-----	-----

GPM	100	200	300	400	425
PSI		108	105	100	99
HP		23	29	34	35

www.kifco.com

Water-Reels B-Series Ag-Rain Specialty Pumps

Special Execution

700 S. Schrader Ave. P.O. Box 290 Havana, IL 62644 800-452-7017 Toll Free 309-543-4425 Phone 309-543-4945 Fax www.kifco.com

Consult Factory