


Most Trusted Traveling Irrigation Systems Since 1964

Caprari Model DMR80 3/2 PTO Pump



- Compact, reliable PTO pump capable of 200 to 800 gpm with corresponding pressures of 193 to 142 psi using 51 to 90 hp
- Available with heavy duty two wheeled trailer or galvanized three point mount
- Designed with industry leading oil lubricated step up gearbox (no belts or pulleys) with shafts supported by widely spaced bearings
- Easily replaceable packing gland type water seal
- Pumps can be fitted with 4" female thread discharge priming valve, hand primer, fluid filled pressure gauge, short suction adapter with 5" female pipe thread and #8 heavy duty 1 3/8 six spline PTO shaft

Technical Specifications						
Discharge & Suction	(Bare or Pump, Cart & Shaft) Flanged					
Discharge & Suction	(Fully Fitted) 4" NPT (F) Discharge, 5" NPT (F) Suction					
Discharge Position	Horizontal, Right Facing (When Standing Behind The Suction End)					
Length	70 Inches					
Width	54 Inches					
Height	41 Inches					
Weight (Unfitted)	400 lbs.					
Weight (Fitted)	460 lbs.					
Configurations						
Bare Pump	Pump only with weld-on companion flanges, gaskets, nuts & bolts					
Pump, Cart & Shaft	Same as bare pump, but mounted on two- wheeled cart & PTO drive shaft					
Fully Fitted	Sames as pump, cart & shaft plus hand primer, check valve, pressure gauge and suction fittings					
Options (Additional Fees Apply)						
Three-Point Hitch	Fully galvanized frame may be substi- tuted for cart					
Suction Hose	5" x 30' Aquaflex					
Foot Valves & Strainers	5" Cast or Aluminum 45°					
Special Execution	Consult Factory					
The performance information contained herein is based or	n ideal conditions. Actual performance is affected by, but not limited					

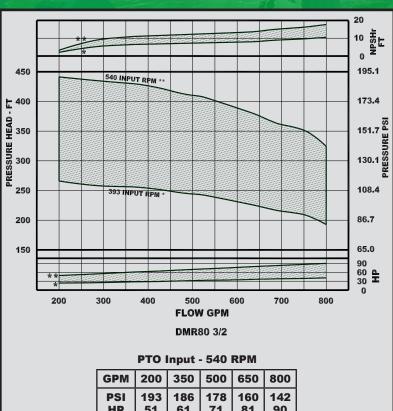

GPM	200	350	500	650	800
PSI HP		186 61			142 90

www.kifco.com



700 S. Schrader Ave. P.O. Box 290 Havana, IL 62644 800-452-7017 Toll Free 309-543-4425 Phone 309-543-4945 Fax www.kifco.com